

Performance Building Solutions



# DuPont™ Tyvek® Roof Protector™

## Synthetic Underlayment



**Lightweight, Strong Roof Protection**  
Excellent grip to the deck and strength of product helps to minimize tearing at fastener points.



**Easy to Install**  
Lays down flat and easy to reposition.



**Trusted Quality and Durability**  
A product you can rely on from DuPont, a leader in science-based building envelope materials.



**Strong, Lightweight Roof Protection.**

DuPont™ Tyvek® Roof Protector™ is an engineered synthetic roofing underlayment with a high strength to weight ratio. Brought to you by DuPont, the trusted name in total building envelope solutions. DuPont™ Tyvek® Roof Protector™ is ideal for steep slope roofing applications under asphalt shingles or metal cladding.

#### DuPont™ Tyvek® Roof Protector™


Roll Size (10 square)	42" X 286'
Rolls Per Pallet	49
Roll Weight	20 lbs
Warranty	20 years
UV Exposure	3 monthss

#### Roof Types

Asphalt Shingle	✓
Metal Cladding	✓

#### Recyclable

ASTM D226 Types I & II	✓
AC188	✓
Intertek CCRR-1087	✓
Class A Per ASTM E108	✓

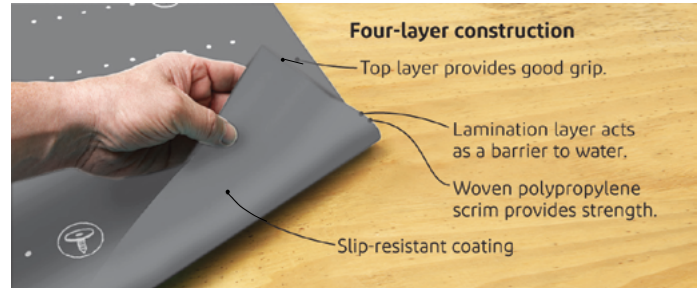

#### Designed to Lay Flat

Lays flat and stays flat for a more uniform shingled surface.

#### Protects the roof

Preserves the roof deck during installation and provides an effective secondary moisture barrier.



#### Printed Guidelines for Shingle Alignment

2" chalk mark guide lines make installation go quickly.

#### High coverage in a roll

Large, but lightweight roll provides maximum coverage for a quick installation.



## DuPont™ Tyvek® Roof Protector™ – Product Information

### FEATURES/BENEFITS

#### Description

DuPont™ Tyvek® Roof Protector™ – with its four-layer construction providing excellent strength, grip and water-resistance – is the ideal engineered synthetic underlayment for steep slope roofing applications under asphalt shingles or metal panel roof materials, brought to you by the trusted name in total building envelope solutions.

Tyvek® Roof Protector™ is tough and tear-resistant, laying flat and staying flat for easier installation and better coverage per roll. Its high strength to weight ratio, slip-resistant surface and lightweight durability offers peace of mind to professional builders and homeowners alike.

#### Available Sizes

Tyvek® Roof Protector™ is available in 10 square rolls: 42" x 286'/1.1m x 87.2m (93.0m²)

#### Ease of Use

Tyvek® Roof Protector™ preserves the roof deck during installation, minimizing tearing at fastener points as a result of its excellent strength and deck grip. Tyvek® Roof Protector™ comes with a number of features and benefits:

- Lightweight material lays flat, stays flat and repositions with ease
- Large roll provides maximum coverage for quick installation
- Features 2" chalk mark guide lines for easier shingle alignment
- Acts as an effective secondary moisture barrier
- Withstands up to 90 days of UV exposure and comes with a 20-year limited warranty
- Low flame spread with a class "A" fire rating per ASTM E108
- Florida Building Code approved and meets AC188 (Intertek CCRR-1062), ASTM D226 Types 1 & II, CAN/CSA A123.3, CAN/CSA A220.1